


八、 高温加热板



(上图) 型号 HP99YH 带有不锈钢板和“D”远程数字恒温器控制，最高操作温度为 1,000F (537C)。

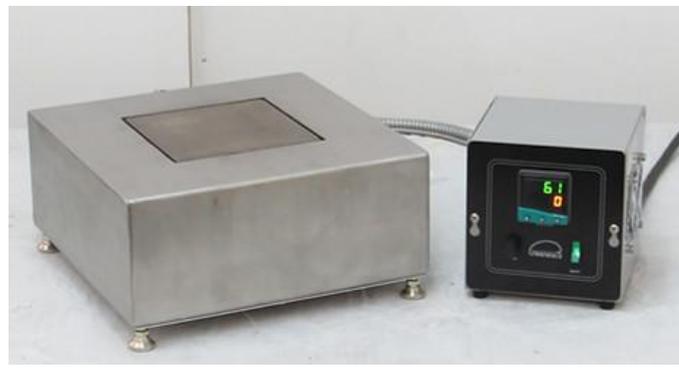

(下图) HP66YX 型号 采用不锈钢板和“RS”远程恒温控制，最高操作温度可达 1,292F (700C)。使用可选绝缘罩，温度能力可提高至 1500F (815C)



(下图) 型号 HP66YX 配有可选绝缘罩。

Model	HEATED AREA	OVERALL DIMENSIONS	Voltage	Max temp/F (C)
HP66YH	6 X 6"	11 W X 11 D X 5" H	120/240V, 1100 W	1000F (537C)
HP99YH	9 X 9"	14 W X 14 D X 5" H	240V, 2600 W	1000F (537C)
HP1212YH	12 X 12"	18 W X 18 D X 5" H	240V,5300 W	1000F (537C)
HP1818YH	18 X 18"	26 W X 26 D X 5" H	240V,10300 W	1000F(537C)
HP2424YH	24 X 24"	33 W X 33 D X 5" H	240V,26000 W	1000F(537C)
1500 F Models				
HP66YX	6 x 6"	12 W x 12 D x 6" H	120 / 240V, 2400W	1500F (815C)*
HP99YX	9 X 9"	15 W x 15 D x 6" H	240V, 4000W	1500F (815C)*
HP1212YX	12 X 12"	19 W x 19 D x 6" H	240V, 7200W	1500F (815C)*
HP1818YX	18 X 18"	28 W X 28 D X 6" H	240V,13000 W	1500F (815C)*
HP2424YX	24 X 24"	34 W X 34 D X 6" H	240V,23600 W	1500F (815C)*

*Maximum temperature with hood. Maximum without hood is 1,292F (700C)